

LED FLOORLIGHT



FL30650030

Capacity: 30W
 Voltage: AC100-240V;50/60Hz
 Dimmer: Touch Screen Dimmer
 Lumen Output: 2400lm
 CRI.: >80
 Power Factor: >0.95
 Beam Angle: 110°
 Colors: White/Black/Sliver
 Size: 650*300*2000mm
 Compliance With: CE/RoHs/SAA/UL/cUL



FL30650060

Capacity: 60W
 Voltage: AC100-240V;50/60Hz
 Dimmer: Touch Screen Dimmer
 Lumen Output: 4800lm
 CRI.: >80
 Power Factor: >0.95
 Beam Angle: 110°
 Colors: White/Black/Sliver
 Size: 650*300*2000mm
 Compliance With: CE/RoHs/SAA/UL/cUL




FL50702100

Capacity: 100W
 Voltage: AC100-240V;50/60Hz
 Dimmer: Touch Screen Dimmer
 Lumen Output: 8000lm
 CRI.: >80
 Power Factor: >0.95
 Beam Angle: 110°
 Colors: White/Black/Sliver
 Size: 700*500*2000mm
 Compliance With: CE/RoHs/SAA/UL/cUL




FL35512030

Capacity: 30W
 Voltage: AC100-240V;50/60Hz
 Dimmer: Touch Screen Dimmer
 Lumen Output: 2250lm
 CRI.: >80
 Power Factor: >0.95
 Beam Angle: 110°
 Colors: White/Black/Sliver
 Size: 345*510*2000mm
 Compliance With: CE/RoHs/SAA/UL/cUL

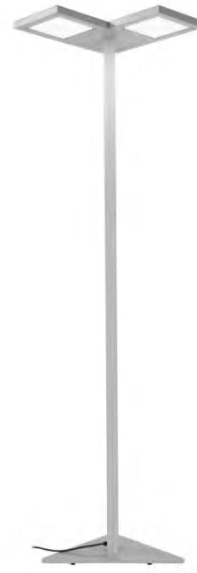

FL55732030

Capacity: 30W
 Voltage: AC100-240V;50/60Hz
 Dimmable: 1-10V
 Lumen Output: 2550lm
 CRI.: >80
 Power Factor: >0.90
 Beam Angle: 110°
 Rotation Angle: White/Black/Sliver
 Remote Control: 735*550*2000mm
 Colors: CE/RoHs/SAA/UL/cUL

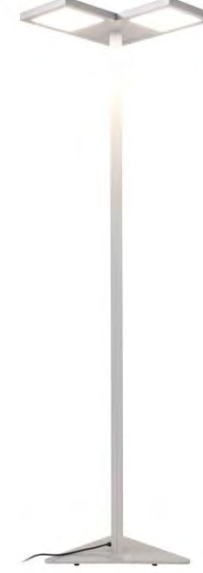

FL55732045

Capacity: 45W
 Voltage: AC100-240V;50/60Hz
 Dimmable: 1-10V
 Lumen Output: 3825lm
 CRI.: >80
 Power Factor: >0.90
 Beam Angle: 110°
 Rotation Angle: White/Black/Sliver
 Remote Control: 735*550*2000mm
 Colors: CE/RoHs/SAA/UL/cUL

Specifications Subject To Changes Without Prior Notice

SUNWIND LIGHTING COMPANY LIMITED

Block 2,182 Industrial Park,Shanglilang,Buji,Shenzhen,China 518112

T: +86 755 8661 0835

F:

+86 755 8661 0201

E: sales@sunwindled.com

W:

www.sunwindled.com



SUNWIND

LED PENDANT LIGHT/LED WALL LIGHT



PL26462030	
Capacity:	30W
Voltage:	AC100-240V;50/60Hz
Dimmable:	1-10V
Lumen Output:	2250lm
CRI.:	>80
Power Factor:	>0.95
Beam Angle:	90°
Colors:	White/Black/Sliver
Size:	460*260*25mm
Compliance With:	CE/RoHs/SAA/UL/cUL

PL26663045	
Capacity:	45W
Voltage:	AC100-240V;50/60Hz
Dimmable:	1-10V
Lumen Output:	3825lm
CRI.:	>80
Power Factor:	>0.95
Beam Angle:	90°
Colors:	White/Black/Sliver
Size:	660*260*25mm
Compliance With:	CE/RoHs/SAA/UL/cUL

PL26864060	
Capacity:	60W
Voltage:	AC100-240V;50/60Hz
Dimmable:	1-10V
Lumen Output:	5100lm
CRI.:	>80
Power Factor:	>0.95
Beam Angle:	90°
Colors:	White/Black/Sliver
Size:	860*260*25mm
Compliance With:	CE/RoHs/SAA/UL/cUL



WL08350018	
Capacity:	18W
Voltage:	AC100-240V;50/60Hz
Dimmable:	1-10V
Lumen Output:	1530lm
CRI.:	>80
Power Factor:	>0.90
Beam Angle:	110°
Rotation Angle:	330°
Remote Control:	Optional
Colors:	White/Black/Sliver
Size:	350*80*240mm
Compliance With:	CE/RoHs/SAA/UL/cUL

WL15510030	
Capacity:	30W
Voltage:	AC100-240V;50/60Hz
Dimmable:	1-10V
Lumen Output:	2700lm
CRI.:	>80
Power Factor:	>0.90
Beam Angle:	110°
Rotation Angle:	330°
Remote Control:	Optional
Colors:	White/Black/Sliver
Size:	510*150*340mm
Compliance With:	CE/RoHs/SAA/UL/cUL

WL15510040	
Capacity:	40W
Voltage:	AC100-240V;50/60Hz
Dimmable:	1-10V
Lumen Output:	3600lm
CRI.:	>80
Power Factor:	>0.90
Beam Angle:	110°
Rotation Angle:	330°
Remote Control:	Optional
Colors:	White/Black/Sliver
Size:	510*150*340mm
Compliance With:	CE/RoHs/SAA/UL/cUL

Specifications Subject To Changes Without Prior Notice

SUNWIND LIGHTING COMPANY LIMITED

Block 2,182 Industrial Park,Shanglilang,Buji,Shenzhen,China 518112

T: +86 755 8661 0835

F:

+86 755 8661 0201

E: sales@sunwindled.com

W:

www.sunwindled.com



SUNWIND