

LED EMERGENCY EXIT LIGHTS

Lifespan:>50000Hours
 Comply To:SAA/CE/ROHS/IEC/TUV/SS563/SS508

TECHNICAL DATA



Model No. : EB18927511
 Power Consumption : 5W
 Power Supply : AC110V/AC220V;50HZ/60HZ
 Lighting Resource : LED
 Standby Time : >3Hours
 Charging Time : <16Hours
 Battery Type : High Temperature Ni-Cd
 Battery Capacity : 2000mAH
 Safety Features : Low Volt Cut-Off Preventing
 : Battery Overdischarge Preventing
 Material Body : Aluminum
 Diffuser : PVC
 Optional Colors : Sliver,White
 Mounting : Wall, Ceiling Surface,Suspending,Or Recessed
 Outlet Cable : Hard wired(Live/Neutral/Earth Wires)
 Size: : 415*232*32mm
 Weight : 1.50kgs
 Warranty : 3Years(Battery 1 Year)


Recessed Kit



Four Standard Diffuser

(Please check with Sales Dept. if Customisation is Required)

Recessed Installation

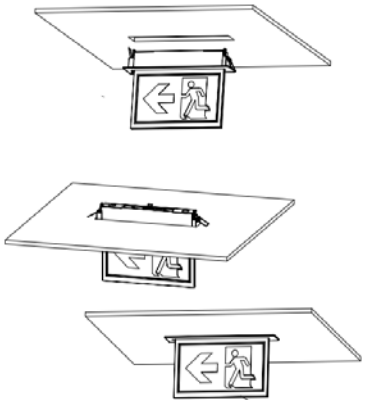

Running Man+Door		Running Man+Door+ Left/Right Arrow	
Running Man+Door+ Down Arrow		White	

KEY FEATURES

- >Diffusers Changeable
- >Wall,Ceiling,Suspending and Recessed Mountable
- >Quick & easy to install and maintain
- >Low Power Consumption
- >Long life
- >3Years Warranty(Battery 1 Year)

PACKAGE INFORMATION

Inner Box : 435*255*55mm
 Gross Weight : 1.8Kgs
 Carton Size : 450*560*570
 Qty./Carton : 10pcs
 Loading Qty. 20FCL : 10000Pcs
 40FCL : 20000Pcs
 40HQ : 22000Pcs

Specifications Subject To Changes Without Prior Notice 23

SUNWIND LIGHTING COMPANY LIMITED
 Block 2,182 Industrial Park,Shanglilang,Buji,Shenzhen,China 518112
 T: +86 755 8661 0835 F: +86 755 8661 0201
 E: sales@sunwindled.com W: www.sunwindled.com

